


# GreenBlock


High-load bracket for the greening of insulated facades

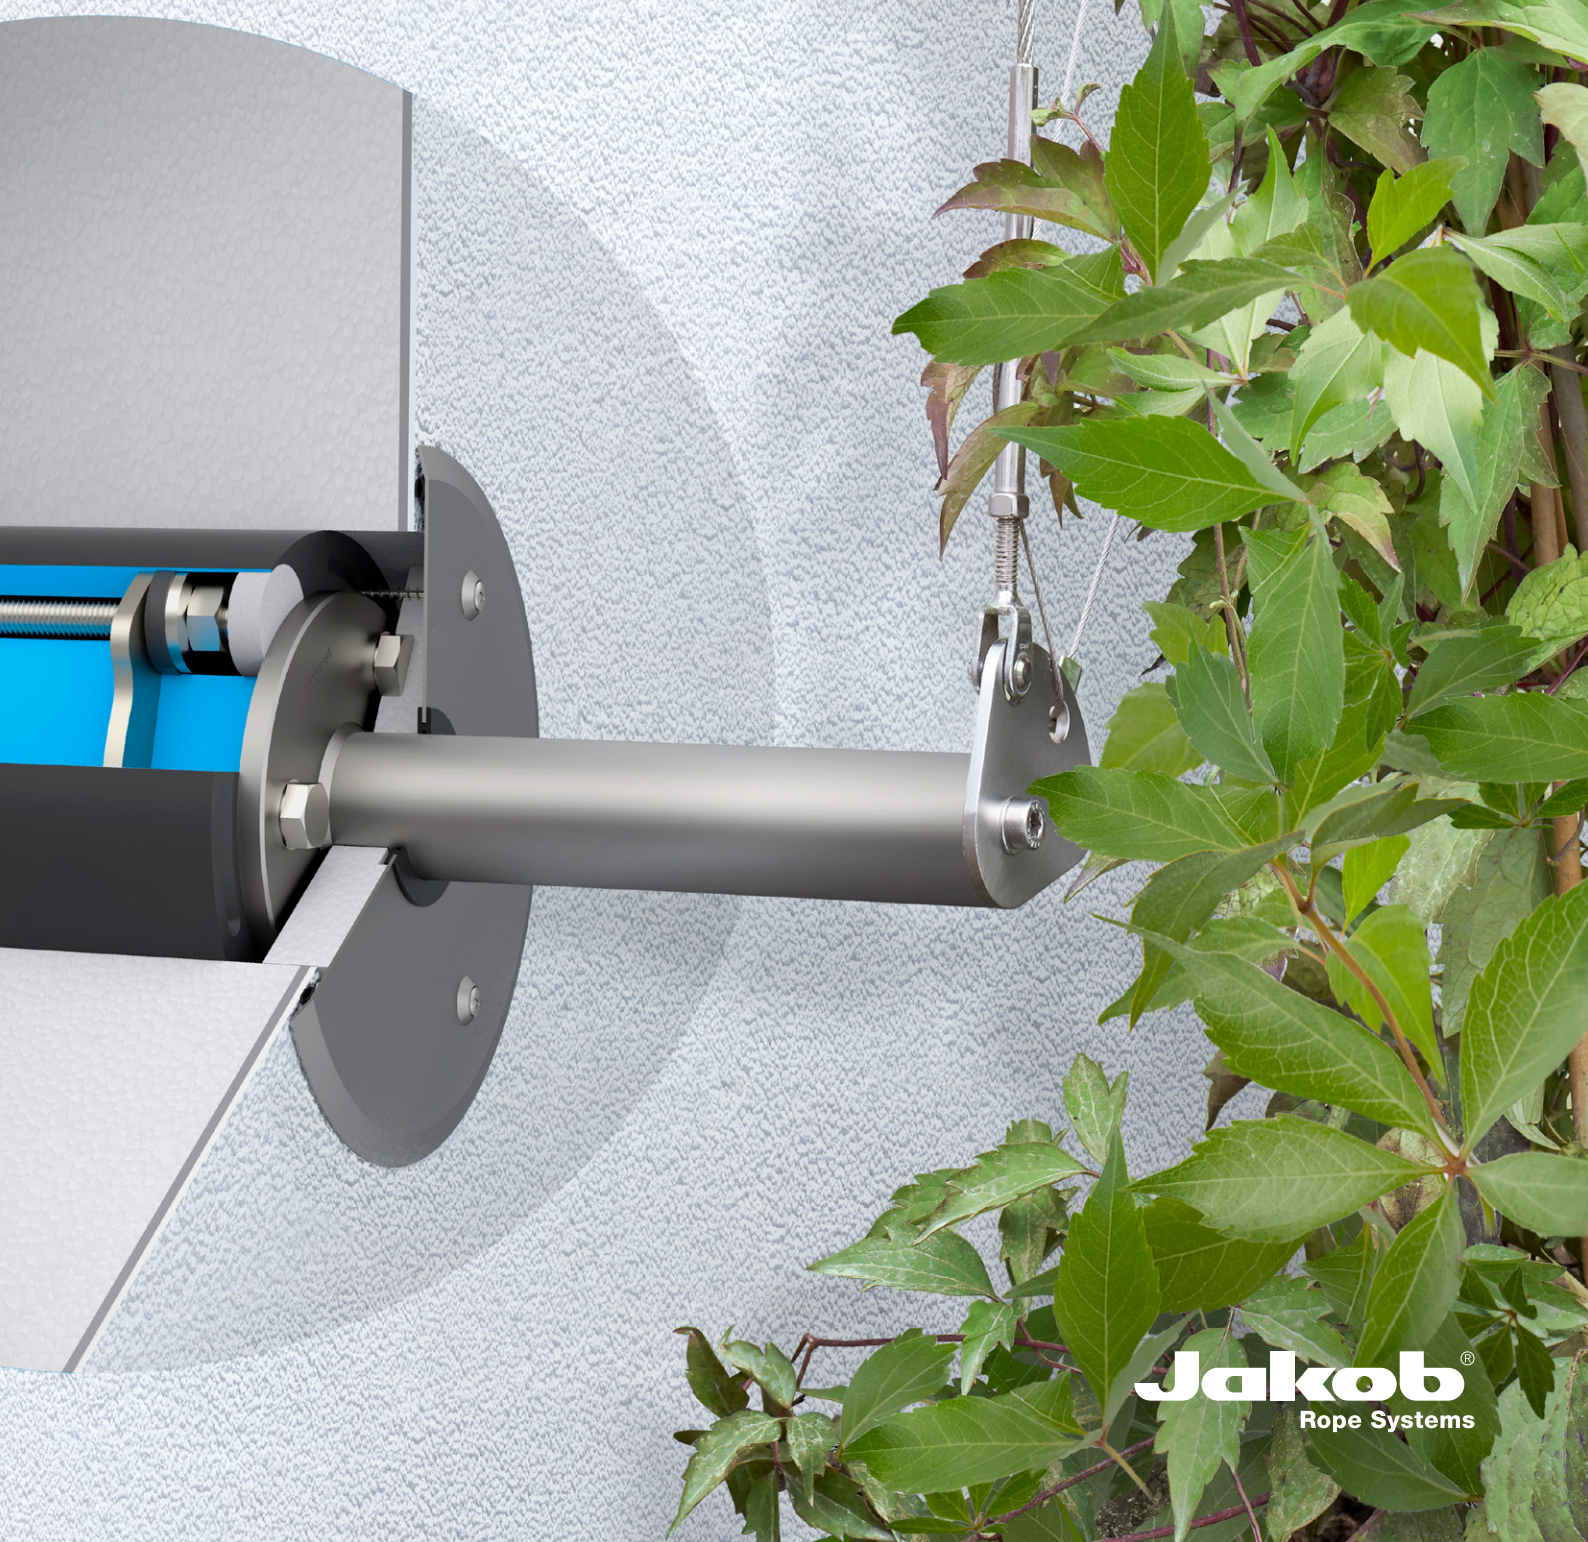

# GreenBlock

Our solution for the greening of ETICS facades

- ▶ Thermally separated bracket for installing GreenTrellis and Webnet trellises
- ▶ Load transfer of the maximum loads (component resistance values) via the spacers
- ▶ Subsequent assembly of trellises on ETICS facades possible
- ▶ Cut-out in the facade, installation of the GreenBlock and subsequent sealing in one installation step
- ▶ Reduced installation time thanks to the cylindrical design and suitable installation tool
- ▶ Everything from a single source: engineering, component and, if required, assembly

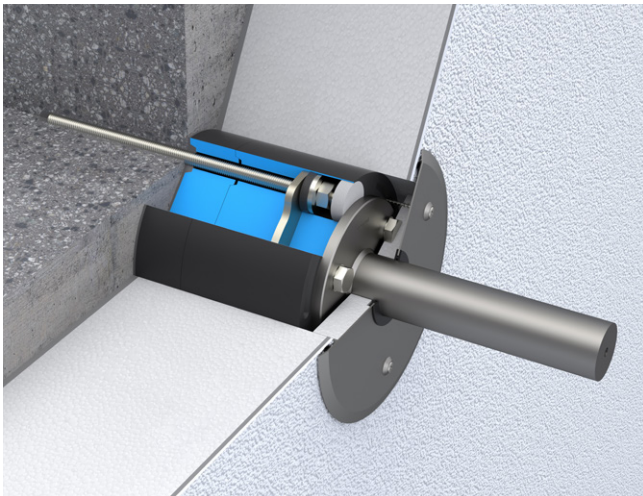


## **GreenBlock 160 für Spacer Webnet**

Anchoring in concrete

Insulation thickness 120–260 mm

Drilling diameter 160 mm

Cover plate diameter 210 mm

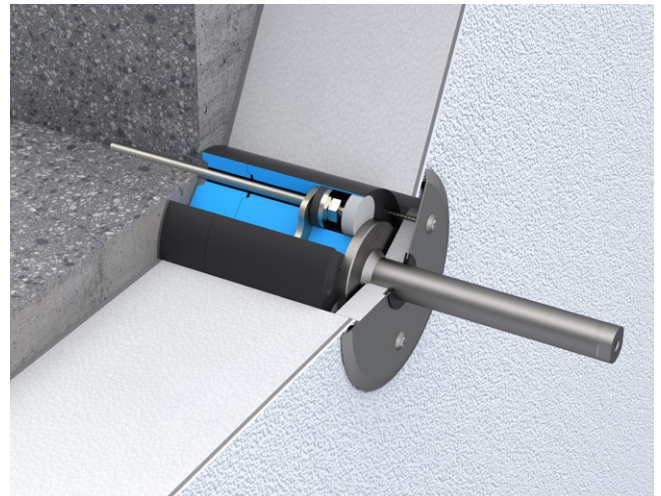

## **GreenBlock 125 für Spacer GreenTrellis**

Anchoring in concrete

Insulation thickness 120–260 mm

Drilling diameter 125 mm

Cover plate diameter 170 mm